




# O2-A2 Oxygen Sensor



**Figure 1 O2-A2 Schematic Diagram**

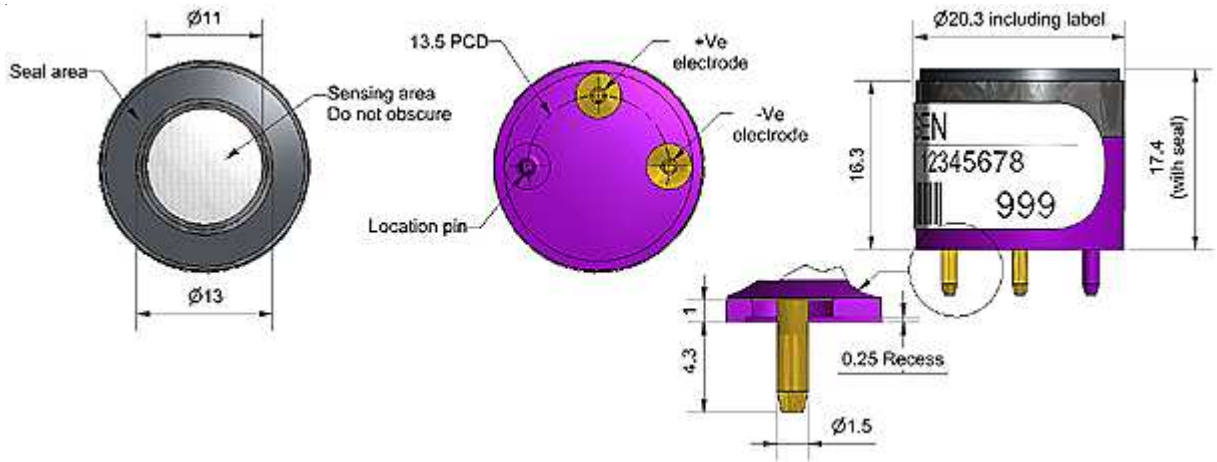

All dimensions in millimetres ( $\pm 0.15$ mm)

**Top View**

**Bottom View**

**Side View**

## PERFORMANCE

Output	$\mu\text{A}$ @ 20.9% $\text{O}_2$	80 to 120
Response time	$t_{90}$ (s) from 20.9% to 0% $\text{O}_2$	< 15
Zero current	$\mu\text{A}$ in $\text{N}_2$	< 2.5
Linearity	% $\text{O}_2$ deviation @ 10% $\text{O}_2$	0.6

## LIFETIME

Output drift	% change in output @ 3 months	< 1
Operating life	months until 85% original output of 20.9% $\text{O}_2$	> 24

## ENVIRONMENTAL

Humidity Sensitivity	% $\text{O}_2$ change: 0% to 95% rh @ 40°C	< 0.7
$\text{CO}_2$ sensitivity	% (change $\text{O}_2$ reading) / % $\text{CO}_2$ @ 5% $\text{CO}_2$	0.1
Pressure sensitivity	(% change of output)/(% change of pressure) @ 20kPa	< 0.1

## KEY SPECIFICATIONS

Temperature range	°C	-30 to 55
Pressure range	kPa	80 to 120
Humidity range	% rh non-condensing (0 to 99% rh short term)	5 to 95
Storage period	months @ 3 to 20°C (store in sealed pot, open circuit)	6
Load resistor	$\Omega$ (recommended)	47 to 100
Diameter	mm (including label)	20.0
Height	mm (including foam ring)	17.4
Weight	g	< 16



At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

**NOTE:** all sensors are tested at ambient environmental conditions with 47 ohm load resistor, unless otherwise stated. An application of use are outside our control, the

**ApolloSense Ltd**

**Technical Specification**



# O2-A2 Performance Data

**Technical Specification**

**Figure 2 Output Temperature Dependence**


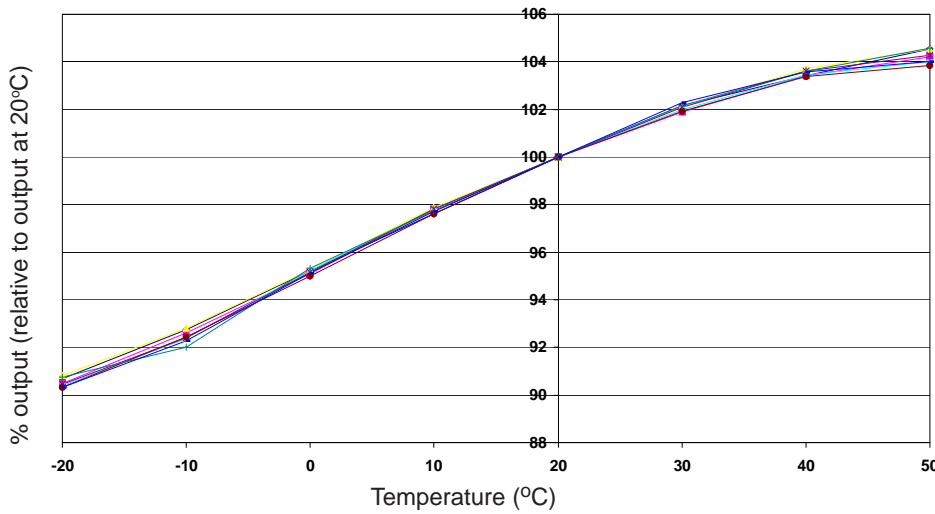



Figure 2 shows the variation in sensitivity caused by changes in temperature. Temperature dependence is very repeatable.

**Figure 3 Sensitivity at 50°C**

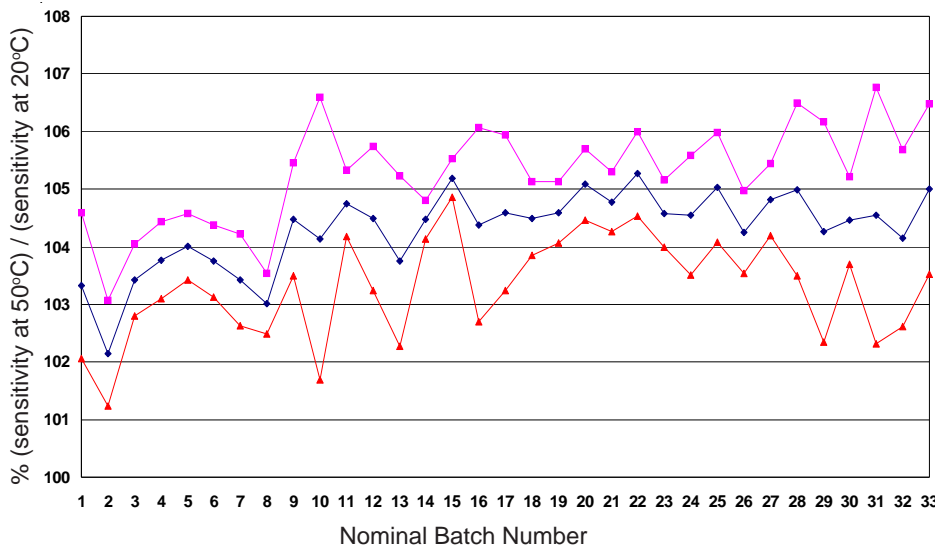

This plot of the mean and  $\pm 95\%$  confidence intervals for 34 batches shows superior repeatability of the sensitivity dependence from batch to batch, giving confidence when setting temperature compensation in your gas detector.

**Figure 4 Thermal Transient Performance**

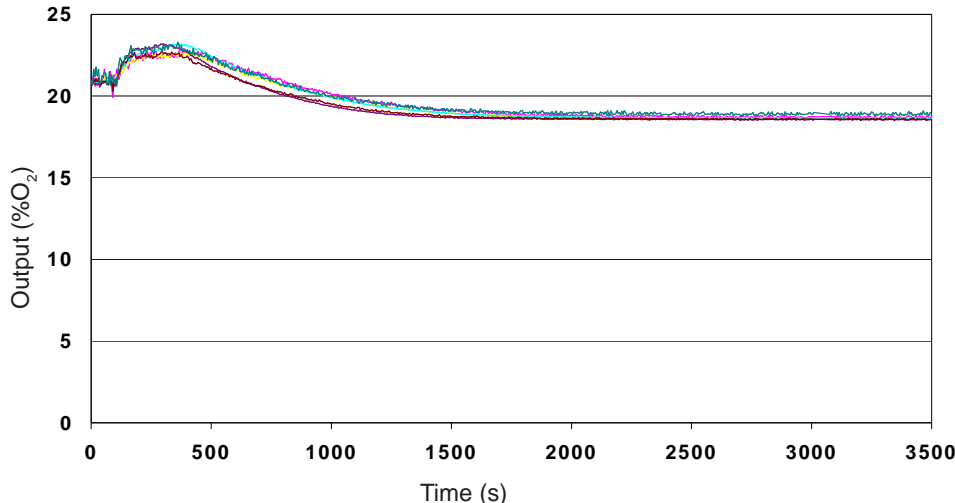

Sensors were thermally shocked from 20°C to -30°C. Consistent manufacture and good design ensure that there are no thermal spikes which can cause an alarm.